

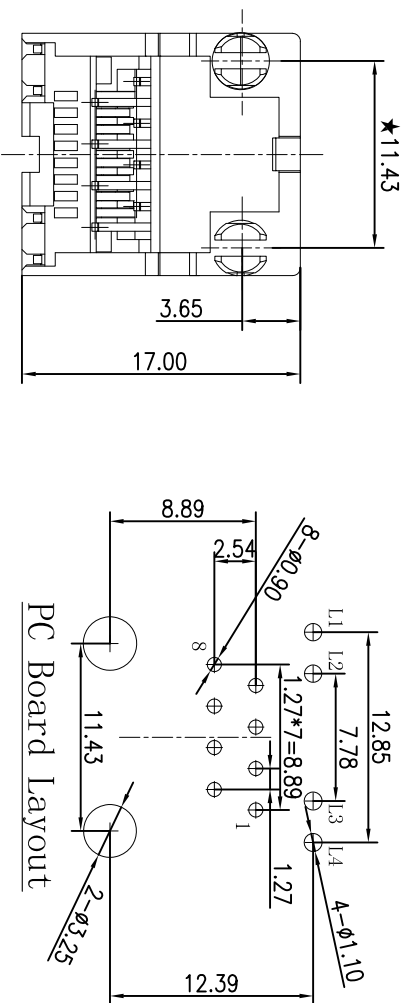
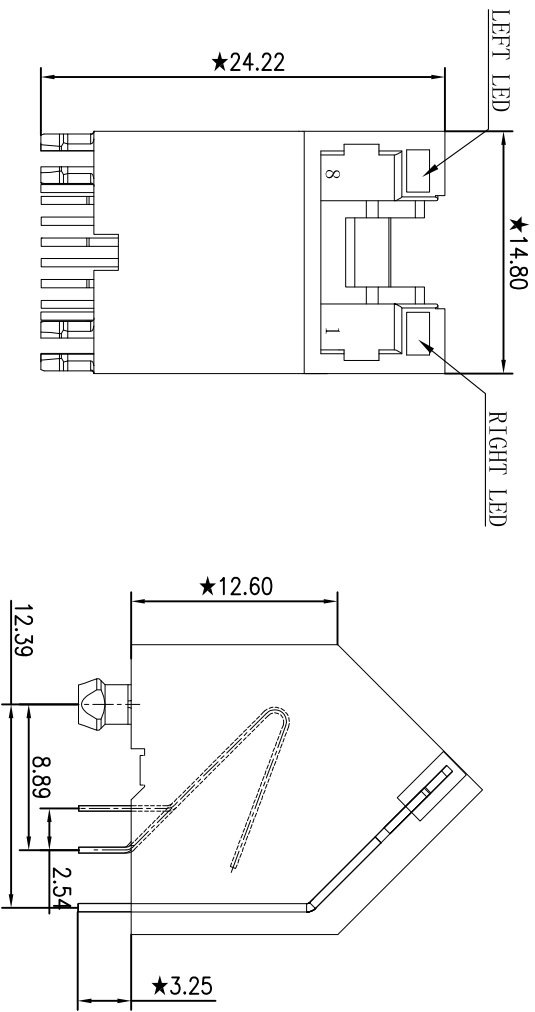


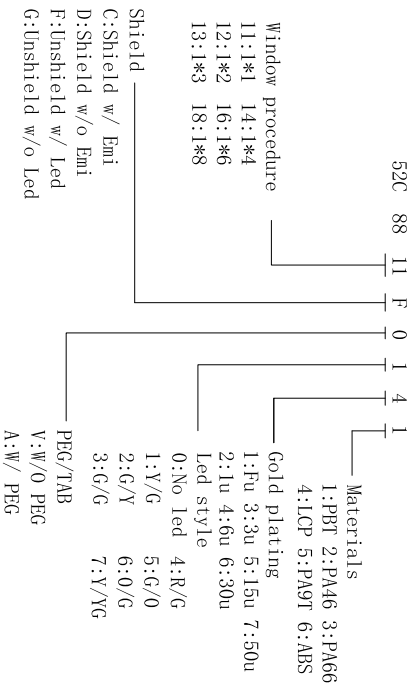

PC Board Layout

- NOTES
- MECHANICAL:
- HOUSING MATERIAL: PBT WHITE UL94V-0
 - CONTACT MATERIAL: PHOSPHOR BRONZE T=0.35mm.
 - PLATING: GOLD PLATING AT CONTACT AREA, NICKEL 30u" MIN. OVER ALL
 - PERATING LIFE:750 CYCLES MIN.
 - MATING/UNMATING FORCE: 30X/3.06KGF MAX
 - RETENTION STRENGTH:50N MIN. FOR 60S±5S ELECTRICAL:
 - VOLTAGE RATING: 125 VAC RMS.
 - CURRENT RATING: 1.5 AMP.
 - CONTACT RESISTANCE : 30mΩ MAX.
 - INSULATION RESISTANCE: 100MΩ MIN. AT 500V DC .
 - DIELECTRIC STRENGTH:1000V AC OR 1500V DC RMS AT 0.5mA 50Hz/60Hz FOR 1MINUTE.
 - LED OPERATION VOLTAGE:1.8~2.6V.
 - LED OPERATION CURRENT:20 mA Max.
- ENVIRONMENTAL:
- STORAGE: -40℃ TO +85℃ RELATIVE HUMIDITY<80%.
 - OPERATION: -40℃ TO +85℃.

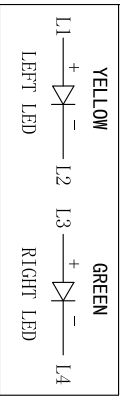

			Designer	ZWX	Tolerances (mm)			Title	PO NO.
			Auditor	ZL	0.0 ±0.25			8P8C 白色 全塑 无耳 左黄右绿 PBT料	52C8811F0141
			Authorizer	ZL	0.00 ±0.20				
			SCALE	1:1	0.000 ±0.1				
DATE	ECN NO.	SPEC	DESIGNER	AUDITOR	SIZE	A4	Angles ±1°		