
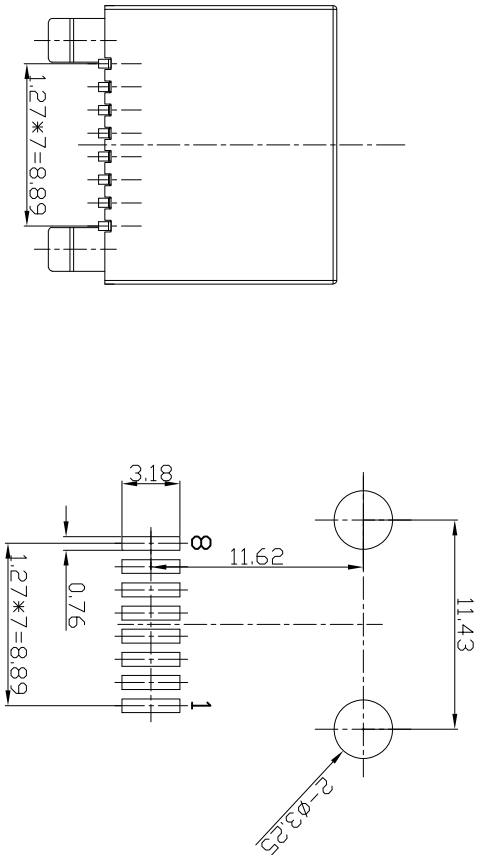
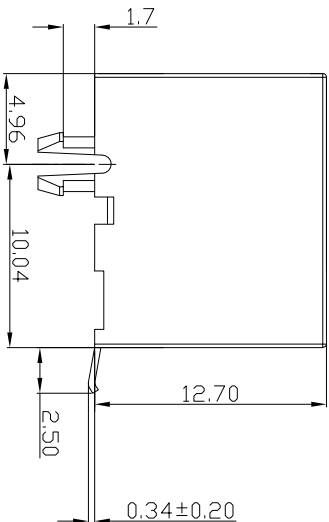


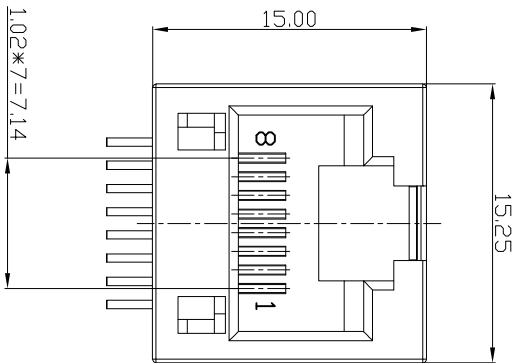

PC BOARD LAYOUT

- NOTES
- MECHANICAL:
1. HOUSING MATERIAL: PA9T BLACK UL94V-0
 2. CONTACT MATERIAL: PHOSPHOR BRONZE T=0.3mm.
 3. PLATING: GOLD PLATING AT CONTACT AREA, NICKEL 30u" MIN. OVER ALL
 4. OPERATING LIFE: 750 CYCLES MIN.
 5. MATING/UNMATING FORCE: 30N/3.06kgf MAX
 6. RETENTION STRENGTH: 50N MIN. FOR 60S±5S
- ELECTRICAL:
1. VOLTAGE RATING: 125 VAC RMS.
 2. CURRENT RATING: 1.5 AMP.
 3. CONTACT RESISTANCE : 30mΩ MAX.
 4. INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC .
 5. DIELECTRIC STRENGTH: 1000V AC OR 1500V DC RMS AT 0.5mA 50Hz/60Hz FOR 1MINUTE.
- ENVIRONMENTAL:
1. STORAGE: -40℃ T0 +85℃ RELATIVE HUMIDITY<80%.
 2. OPERATION: -40℃ T0 +85℃.

- 52S 88 11 X X X X X X
- Window procedure
- 11:1*1 14:1*4
12:1*2 16:1*6
13:1*3 18:1*8
- Shield
- C:Shield w/ Emi
D:Shield w/o Emi
F:Unshield w/ Led
G:Unshield w/o Led
- Led style
- 0:No Led 4:R/G
1:Y/G 5:G/O
2:G/Y 6:O/G
3:G/G 7:Y/YG
- Colour
- 1:White 2:Black 3:Red
4:Green 5:Yellow~114C
6:Gray 7:Blue
- Materials
- 1:PBT 2:PA46 3:PA66
4:LCP 5:PA9T 6:ABS
- Gold plating
- 1:Fu 3:3u 5:15u 7:50u
2:1u 4:6u 6:30u

			Designer	ZWX	Tolerances (mm)			Title	8P8C 全塑有塑脚 SMT PA9T料
			Auditor	ZL	0.0 ±0.25				
			Authorizer	ZL	0.00 ±0.20				
			SCALE	1:1	0.000 ±0.1				
DATE	ECN NO.	SPEC	DESIGNER	AUDITOR	SIZE	A4	Angles ±1°	PO NO.	52S8811FX045