

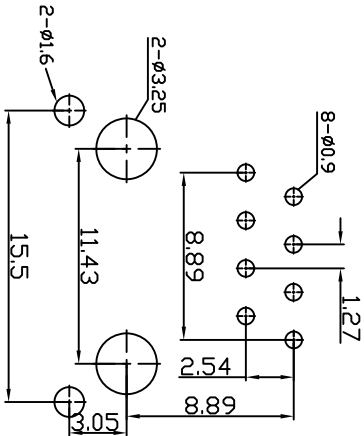
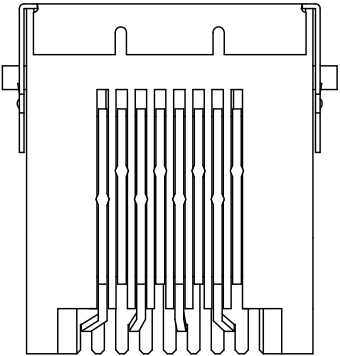
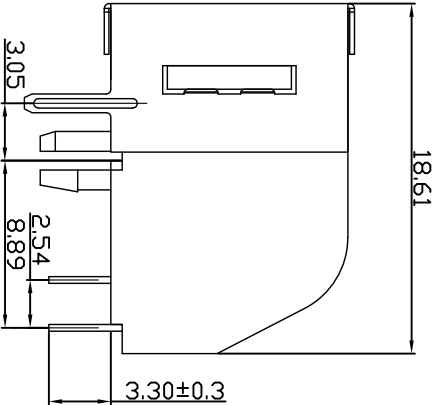


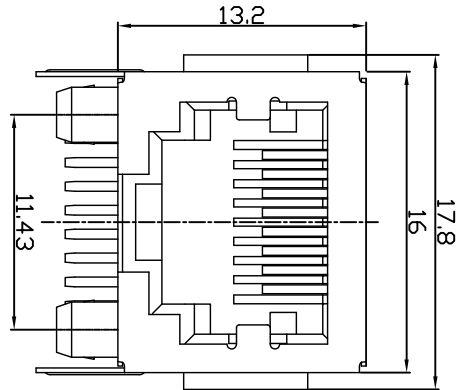

PC Board Layout

- NOTES
- MECHANICAL:
1. HOUSING MATERIAL: PBT BLACK UL94V-0
 2. CONTACT MATERIAL: PHOSPHOR BRONZE T=0.3mm.
 3. PLATING: GOLD PLATING AT CONTACT AREA, NICKEL 30u" MIN. OVER ALL.
 4. SHIELD: BRASS T=0.20mm PLATED NICKEL 30u" Min .
 5. OPERATING LIFE: 750 CYCLES MIN.
 6. MATING/UNMATING FORCE: 30N/3.06KGF MAX
 7. RETENTION STRENGTH: 50N MIN. FOR 60S±5S
- ELECTRICAL:
1. VOLTAGE RATING: 125 VAC RMS.
 2. CURRENT RATING: 1.5 AMP.
 3. CONTACT RESISTANCE : 30mΩ MAX.
 4. INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC .
 5. DIELECTRIC STRENGTH: 1000V AC OR 1500V DC RMS AT 0.5mA 50Hz/60Hz FOR 1MINUTE.
- ENVIRONMENTAL:
1. STORAGE: -40℃ T0 +85℃ RELATIVE HUMIDITY<80%.
 2. OPERATION: -40℃ T0 +85℃.

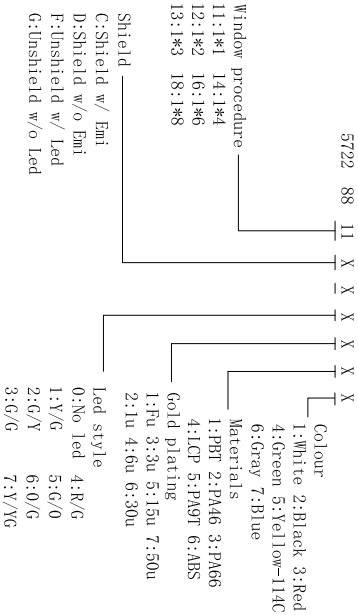

				Designer	ZWX	Tolerances (mm)			Title	P0 NO.
				Auditor	ZL	0.0 ±0.25			8P8C 半包壳 脚前3.05 无灯 PBT料	57228811G00112
				Authorizer	ZL	0.00 ±0.20				
				SCALE	1:1	0.000 ±0.1				
DATE	ECN NO.	SPEC	DESIGNER	AUDITOR	SIZE	A4	Angles ±1°			