

NOTES

MATERIAL

- 1.HOUSING : PBT UL94V-0
- 2.HOLDER : LCP UL94V-0
- 3.CONTACT : PHOSPHOR BRONZE T=0.25mm.
- 4.PLATING : CONTACT AREA-SELECTIVE GOLD PLATING, TAILS PLATING TIN 80u" MIN OVER NICKEL 50u" MIN.
- 5.SHIELD : 0.20mm THICKNESS COPPER ALLOY WITH NICKEL 30u" Min PLATED.

ELECTRICAL


- 1.VOLTAGE RATING : 125 VAC RMS.
- 2.CURRENT RATING : 1.5 AMP.
- 3.CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC RESISTANCE : 1000V AC RMS 50HZ. 1MIN.

MECHANICAL

- 1.DURABILITY : 750 CYCLES MIN.
- 2.PCB RETENTIONPRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL

- 1.STORAGE : -40℃~+85℃.
- 2.OPERATION : -40℃~+85℃.

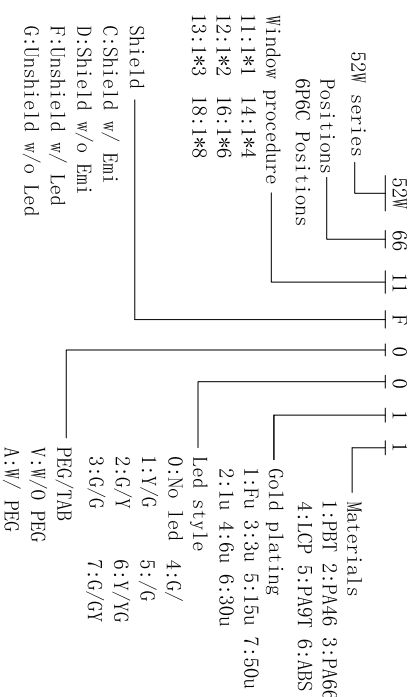

DONG GUAN SHI QIAN YI ELECTRONIC CO.,LTD

			Designer	ZMX	Tolerances (mm)		
			Auditor	ZL	0.0 ±0.25		
			Authorizer	ZL	0.00 ±0.20		
			SCALE	1:1	0.000 ±0.1		
DATE	ECN NO.	SPEC	DESIGNER	AUDITOR	SIZE	A4	Angles ±1°