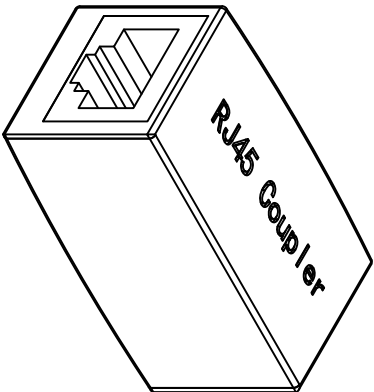
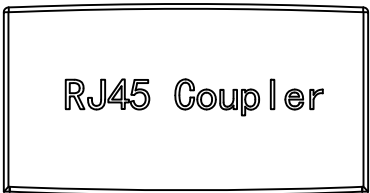


NOTES

ELECTRICAL


- 1. VOLTAGE RATING : 125 VAC RMS.
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
- 5. DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.
- 6. DURABILITY : 750 CYCLES MIN.

ENVIRONMENTAL:

- 1. STORAGE : -40℃~+85℃.
- 2. OPERATION : 0℃~+70℃.

接点:

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
S	S

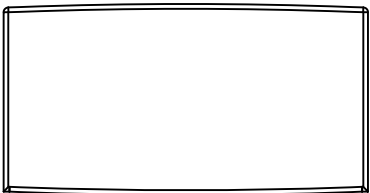

DONG GUAN SHI QIAN YI ELECTRONIC CO.,LTD

Title 10P10C 屏蔽 PVC成型 内置PCB

PO NO. ZTK99813

C	SHELL	PVC BLACK 45P	PCS	1
B	PCB	FR-4	PCS	1
A	CONN	RJ45 10P10C 1X1 屏蔽脚前3.05 黑色PBT	PCS	2
ITEM	NAME	SPECIFICATION	UNIT	QTY

			Designer	ZWX	Tolerances (mm)
			Auditor	ZL	0.0 ±0.25
			Authorizer	ZL	0.00 ±0.20
			SCALE	1:1	0.000 ±0.1
DATE	ECN NO.	SPEC	DESIGNER	AUDITOR	SIZE
					A4
					Angles ±1°



THIRD ANGLE PROJECTION