

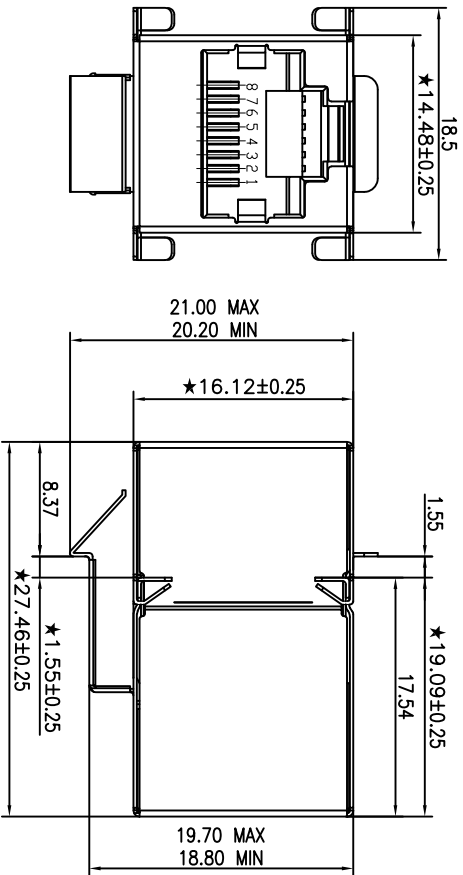
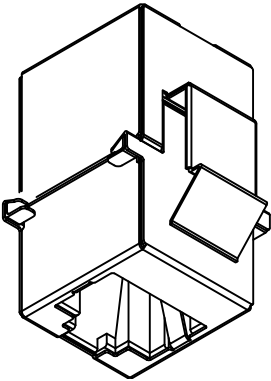
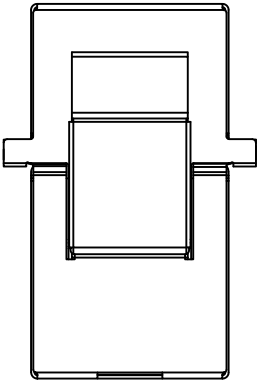


- NOTES
- MECHANICAL:
1. HOUSING MATERIAL: PBT BLACK UL94V-0
 2. INSERT MATERIAL: PBT BLACK UL94V-0
 3. CONTACT MATERIAL: PHOSPHOR BRONZE T=0.35mm.
 4. PLATING: GOLD PLATING AT CONTACT AREA, MATTE TIN AT TAIL. 100u" MIN, NICKEL 30u" MIN. OVER ALL
 5. SHIELD: STAINLESS STEEL T=0.25mm.
 6. OPERATING LIFE: 750 CYCLES MIN.
 7. MATING/UNMATING FORCE: 30N/3.06KGf MAX
 8. RETENTION STRENGTH: 50N MIN. FOR 60S $\pm$ 5S
- ELECTRICAL:
1. VOLTAGE RATING: 125 VAC RMS.
 2. CURRENT RATING: 1.5 AMP.
 3. CONTACT RESISTANCE : 30m Ω MAX.
 4. INSULATION RESISTANCE: 1000M Ω MIN. AT 500V DC .
 5. DIELECTRIC STRENGTH: 1000V AC OR 1500V DC RMS AT 0.5mA 50Hz/60Hz FOR 1MINUTE.
- ENVIRONMENTAL:
1. STORAGE: -40°C TO +85°C RELATIVE HUMIDITY<80%.
 2. GUARANTEE PERIOD: 12 MONTHS
 3. OPERATION: -40°C TO +85°C.



Front Panel Jack Only Clearance
W/O Latch Feature

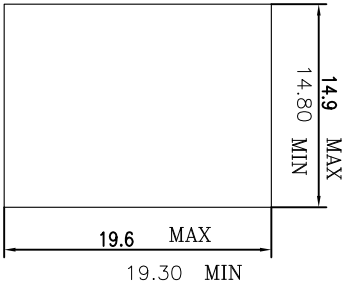

Panel Thickness 1.60mm
Single Panel-Latch Clearance

- ZIT 7 88 4 3 2
- CAT5E series
- Positions
- 8P8C Positions
- Materials
- 1:ABS 2:PBT 3:PVC

- Exterior
- Gold plating
- 1:Unshield w/ Edge w/ Clip 1:6/F 3:6u 5:30u
- 2:Unshield w/ Edge w/o Clip 2:3u 4:15u 6:50u
- 3:Unshield w/o Edge w/o Clip
- 4:Shield w/ Edge w/ Clip
- 5:Shield w/ Edge w/o Clip
- 6:Shield w/o Edge w/o Clip
- 7:Shielding half a pack w/ Edge
- 8:Shielding half a pack w/o Edge

			Designer	ZMX	Tolerances (mm)		Title	DONG GUAN SHI QIAN YI ELECTRONIC CO.,LTD
			Auditor	ZL	0.0 $\pm$ 0.25			
			Authorizer	ZL	0.00 $\pm$ 0.20			
			SCALE	1:1	0.000 $\pm$ 0.1			
DATE	ECN NO.	SPEC	DESIGNER	AUDITOR	SIZE	A4	P0 NO.	ZTH88432