



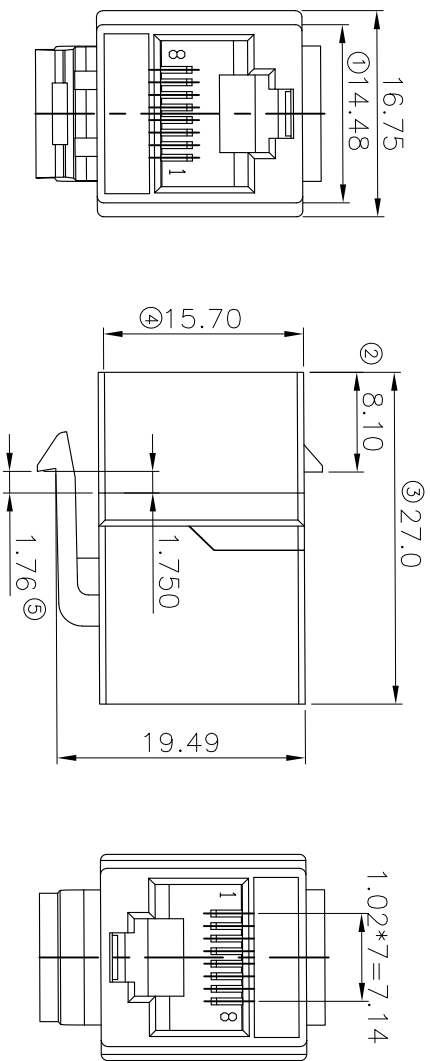

- NOTES
- MECHANICAL:
1. HOUSING MATERIAL: PBT BLACK UL94V-0
 2. CONTACT MATERIAL: PHOSPHOR BRONZE T=0.35mm.
 3. OPERATING LIFE: 750 CYCLES MIN.
 4. MATING/UNMATING FORCE: 30N/3.06KgF MAX
 5. RETENTION STRENGTH: 50N MIN. FOR 60S ±5S
- ENVIRONMENTAL:
1. STORAGE: -0℃ T0 +85℃
 2. OPERATION: -20℃ T0 +75℃.
 3. VOLTAGE RATING: 125 VAC RMS.
 4. CURRENT RATING: 1.5 AMP.
 5. CONTACT RESISTANCE: 30 MILLIOHMS MAX.
 6. INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500V DC .
 7. DIELECTRIC RESISTANCE: 1000V AC RMS 50Hz. 1MIN.
 8. DURABILITY: 750 CYCLES MIN.

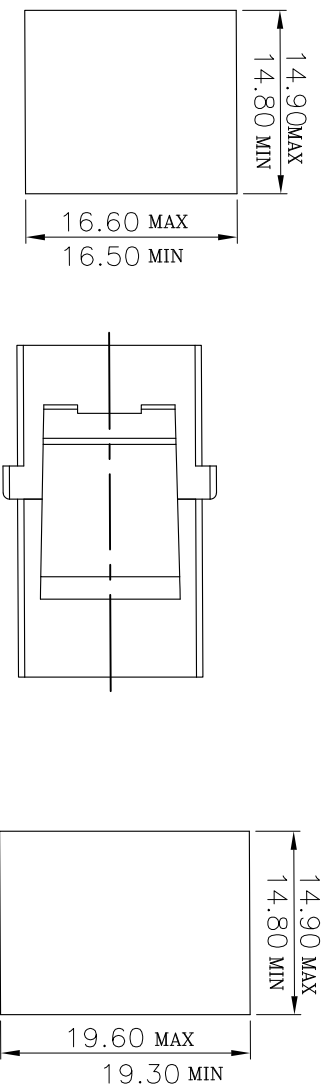

- ZT A 88 1 3 2
- CAT3 series Positions
- 8P8C Positions
- Exterior
- 1: Unshield w/ Edge w/ Clip
- 2: Unshield w/ Edge w/o Clip
- 3: Unshield w/o Edge w/o Clip
- 4: Shield w/ Edge w/ Clip
- 5: Shield w/ Edge w/o Clip
- 6: Shield w/o Edge w/o Clip
- 7: Shielding half a pack w/ Edge
- 8: Shielding half a pack w/o Edge
- Gold plating
- 1: 6/F 3: 6u 5: 30u
- 2: 3u 4: 15u 6: 50u
- Materials
- 1: ABS 2: PBT 3: PVC

Front Panel Jack Only Clearance
w/O Latch Feature

Single Panel-Latch Clearance
Panel Thickness 1.60mm

			Designer	ZMX	Tolerances (mm)			Title	CAT3 全塑 卡扣直通模块 塑胶PBT
			Auditor	ZL	0.0 ±0.25				
			Authorizer	ZL	0.00 ±0.20				
			SCALE	1:1	0.000 ±0.1				
DATE	ECN NO.	SPEC	DESIGNER	AUDITOR	SIZE	A4	Angles ±1°	P0 NO.	ZTA88132